


<b>Dryer body:</b>	Copper tube 19 mm O.D.
<b>Dessicant type:</b>	molecular sieve type XH9 8x12 mesh
<b>Dessicant quantity:</b>	13,5 grams
<b>Max moisture content level:</b>	2,0% of total molecular sieve weight as per L.O.I. test at 960°
<b>Screen holder and perforated baffle:</b>	Cold laminated steel P04
<b>Screen type:</b>	Wire cloth n° 150 (meshes per French inch) - dia mm 0,06 Mesh clearance: 137,5 micron - N° 2,916 meshes per cmq Material: phosphor bronze-stainless AISI 304

d	L	A	B	C
19 mm	113	6,5 mm	2,5 mm	5 mm
+/- 0,02 mm	+/- 4 mm	+/- 0,005 mm	+/- 0,005 mm	+/- 0,005 mm

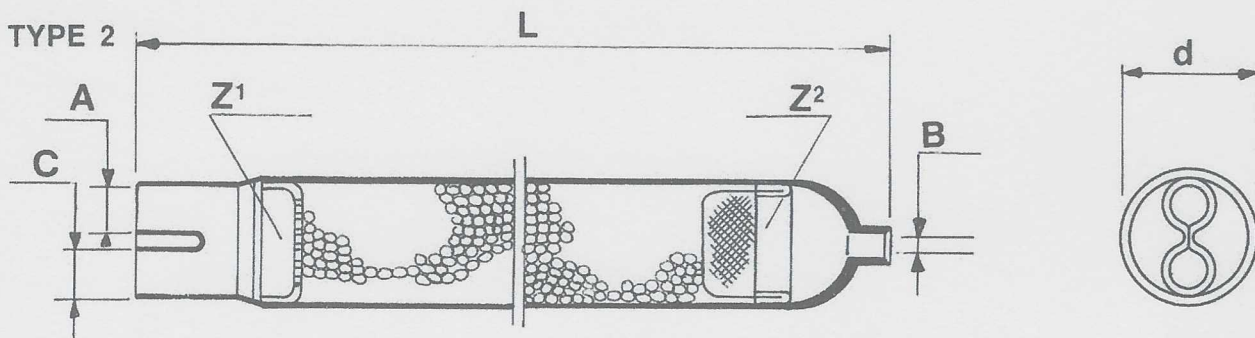

**Customer: TEKNO SOGUTMA**  
**Code: B0004104**