

# Fan Air



**SIZE:**

120×120×38mm

**CONSTRUCTION:**

- Die-cast aluminum housing
- Glass fiber reinforced plastic impeller, UL 94V-0 rating
- Impedance protected
- Leader wire or Terminal is available

**OPERATING TEMPERATURE:**

Ball Bearing      -30°C to +75°C  
Sleeve Bearing   -10°C to +70°C

**WEIGHT:**


530 grams

**Specifications**

Specifications are subject to change without notice

MODEL	BEARING	RATING	FREQUENCY	RATING	POWER	SPEED	AIR FLOW		STATIC	NOISE
		VOLTAGE	Hz	CURRENT	CONSUMPTION	RPM	m <sup>3</sup> /min	CFM	PRESSURE	dB-A
		VAC		A	W				mmH <sub>2</sub> O	
12038B2H*	Ball	220/240	50/60	0.12/0.11	20.0/19.0	2650/2950	2.58/3.20	91/113	7.35/8.62	40/45
12038S2H*	Sleeve									

**Dimensions (mm)**

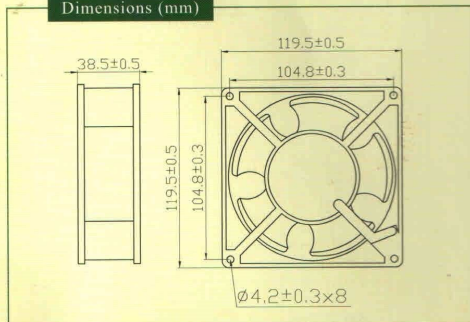

**Performance Curve**

