UNIT:mm

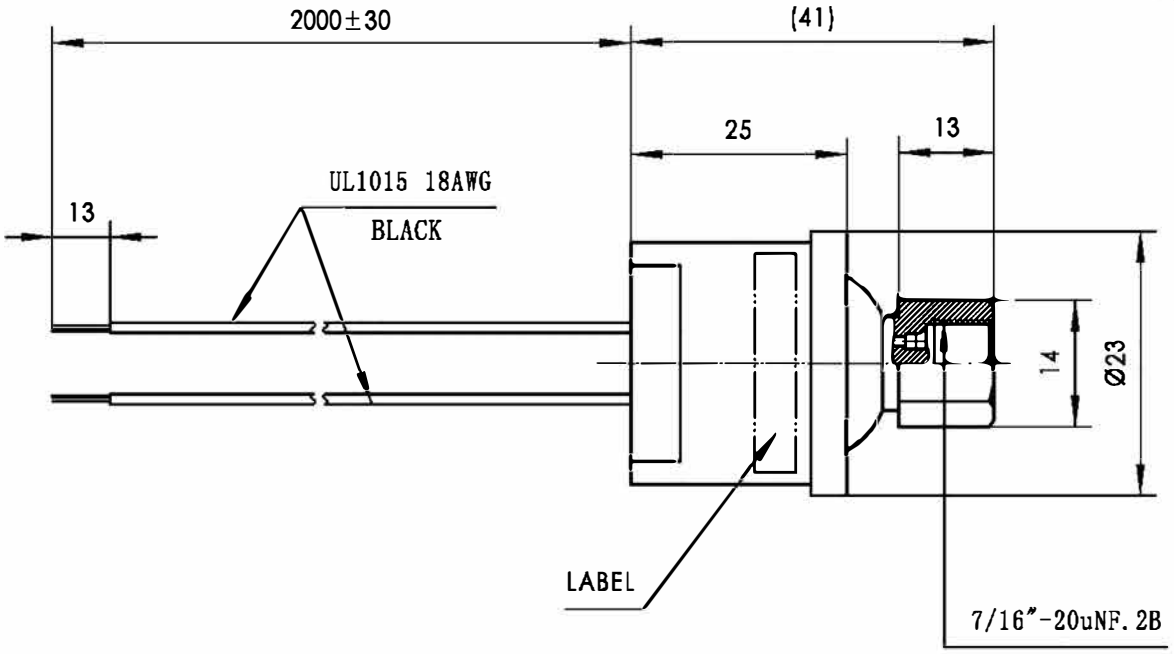

ON:19bar

OFF:16bar

TECHNICAL SPECIFICATIONS

ACTUATION/ON PRESSURE	19bar
RELEASE/OFF PRESSURE	16bar
PROOF PRESSURE	250 PSI
BURST PRESSURE	5000 PSI
TEMPERATURE RANGE	Ambient:-30℃ to +80℃ Fluid: -50℃ to +120℃
ELECTRICAL RATING	50/60Hz, 36VDC, 250VAC, 3A; Voltage Amperage 24 125VA pilot duty 120 375VA pilot duty 240 375VA pilot duty
DIELECTRONIC STRENGTH	750 VRMS open switch 1550 VRMS terminals to fitting
LIFE AT RATED LOAD	100,000 Cycles
SWITCH CONFIGURATION	SPST, at atmospheric pressure:CLOSED

PREESSURE SWITCH DRAWING	CUSTOMER NAME:
	CUSTOMER P/N: