



CODE	INLET F. R.	OUTLET F. R.	CUSTOMER	Notes
50112325	2.5 ±15% L/min	----------	VESTEL	Filter upside down
50112620	2.5 ±15% L/min	----------	VESTEL	Double plastic filter

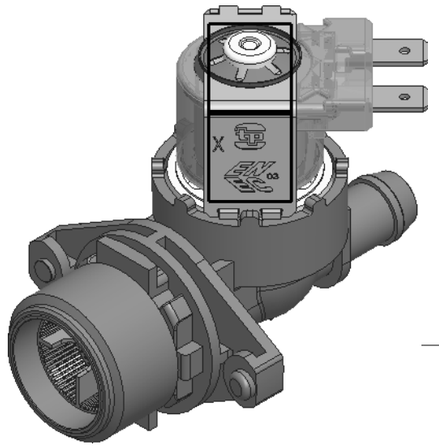

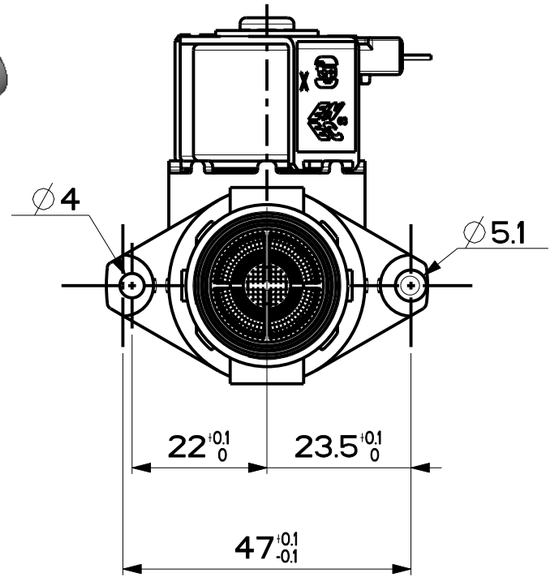

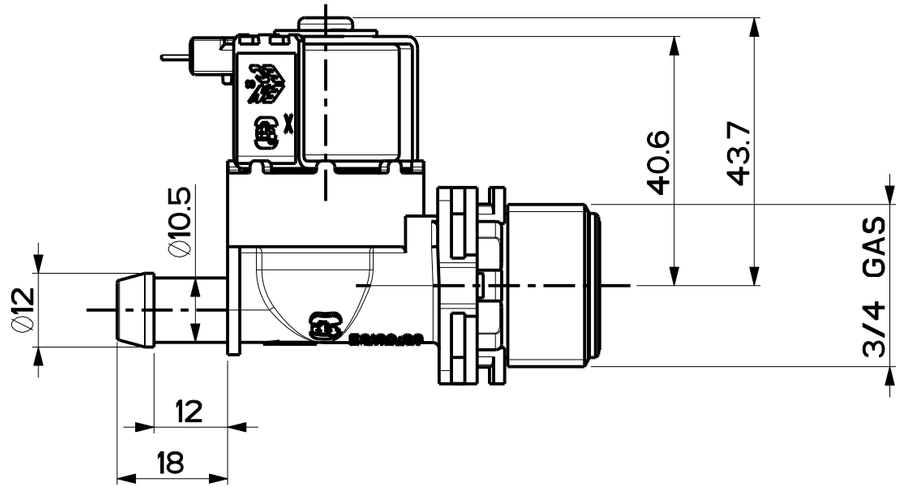

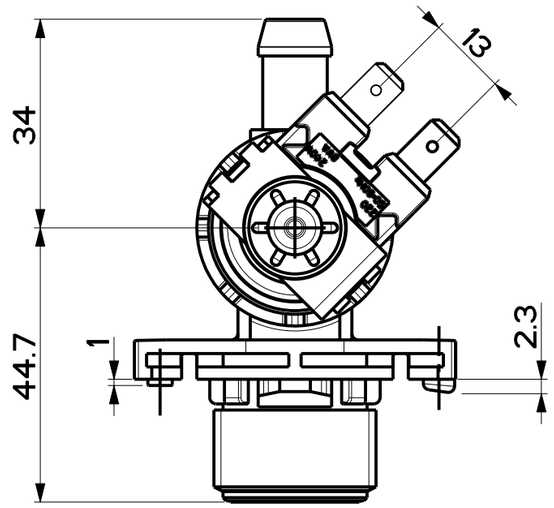

CHARACTERISTICS:

ELECTRICAL RATING	220/240V 50/60Hz 8VA
INSULATION CLASS	II
OPERATING PRESSURE	0.2-10 bar (0.02- 1Mpa)
TEMPERATURES AND SERVICES	T60 °C Tm25 °C 100% ED
	T60 °C Tm90 °C AB 3/5MIN
FLOW RATES	see table
COIL RESISTANCE	5300Ω ±5%

N°	Date	By	CHANGES
--	--	--	--
--	--	--	--
--	--	--	--
B	14/09/20	Moncada	Modified Electrical Rating typing mistake (was 220/240V REINF.)
A	29/07/19	Moncada	Added code 50112620

CRITICAL DIMENSIONS

	Date	By
DRN	Jan-18-18	MORO
CHD	--	
APPR.	Jan-18-18	MORO
Issued	MORO	VALERIO

TP REFLEX GROUP

Title: VALVE ES180/88 SnapFix Assembly 220/240V S15 Coil

Code: O0006630 B

Scale: 1:1
Material: --
Shrinkage: --
Finish: --
Derived from: --

Model file name: 50112325_TAB

Tolerances	<18	18÷30	30÷50	50÷80	80÷120	120÷180	180÷250	250÷315	315÷400	400÷500	ang.
When not shown	±0.13	±0.16	±0.19	±0.23	±0.27	±0.31	±0.36	±0.40	±0.44	±0.48	±1°

CAD Drawing - Not allowed any hand modification.- Copyright by T&P. Any reproduction without written authorization is forbidden.

A3